

QUICK•STEP® INCIZO® SUB-PROFILE FOR STAIRS



LAMINATE *Parquet*

Product description

The Incizo® profile enables you to create stairs that fit perfectly into your interior. Various stair finishes are possible!

Incizo®: Incizo® profile + subprofile for stairs

The subprofile for stairs:

- Aluminum alloy 6060 T66
- Non anodized aluminium, not chromated



INCIZO ®
PATENTED TECHNOLOGY


Installation-instructions

WARNING: READ AND FOLLOW THE SAFETY INSTRUCTIONS INCLUDED WITH POWER TOOLS USED. SAFETY GLASSES SHOULD BE WORN AT ALL TIMES.











Only for use in residential applications .




- Double-check you have ordered the correct aluminium subprofile for the floor of your choice.
- Clear the stairs of debris, making sure that all stairs are clean and level.
- Use screws of 2,5 mm diameter. Drill diameter should be 3 mm.

Installation instructions staircase A













<p>1</p>		<p>Start at the top of the stairs and work downwards.</p>
<p>2</p>		<p>Prepare 2 spacers per stair tread. Important: the spacers should have a thickness of the floor you use, plus 2 mm. This will enable you later to easily insert the tread plank under the stair riser plank.</p>
<p>3</p>		<p>Measure the riser.</p>
<p>4</p>		<p>Saw a plank to the right size. If needed, click 2 planks together and only saw the tongue of the upper plank.</p>
<p>5</p>		<p>Apply glue to the plank.</p>
<p>6</p>		<p>Put the plank against the riser. The groove should be behind the spacers. Repeat 1-6 for the rest of the stairs.</p>
<p>7</p>		<p>Start at the top of the stairs and work downwards.</p>
<p>8</p>		<p>Measure the tread.</p>











9		Saw the aluminium subprofile to the right length.
10		Apply glue to the bottom of the subprofile.
11		Install the subprofile on the tread. Screw it to the stairs, with an interval of 15 cm. Make sure the screws are well countersunk.
12		Saw a plank to the right size. If needed, click 2 planks together and only saw the groove of the last plank.
13		Cut off part A of the Incizo® with the Incizo® knife See instructions included in Incizo® packaging
14		Saw the Incizo® profile to the right length.
15		Depending on the type of subprofile you bought, it is supplied with or without a plastic insert. If a plastic insert is included, cut it to the correct length. *
16		If insert included: way of installing depends on floor thickness, carry out as indicated on the illustration. If insert not included: apply glue to the tongue of the plank. *
17		Apply glue to the subprofile and the rest of the tread. Apply in rows of +/- 3 mm.
18		Spread the glue out well on the subprofile (e.g. by means of a brush). It is important to move to the next steps without delay, so the tread is still adjustable when installing the Incizo® profile.



<p>19</p>		<p>Install the tread plank. Do not press too firmly, so the plank does not tilt but stays nicely flat.</p>
<p>20</p>		<p>Apply glue on both sides of the Incizo® foot.</p>
<p>21</p>		<p>Stick the Incizo® profile horizontally onto the subprofile and adjust the Incizo® and the plank nicely for a level result. Repeat installation for the rest of the stairs.</p> <p>After installation, do not walk on the stairs for at least 24 hours.</p>

Installation instructions staircase B



1		<p>Start at the top of the stairs and work downwards.</p>
2		<p>Prepare 2 spacers per stair tread. Important: the spacers should have a thickness of the floor you use, plus 2 mm. This will enable you later to easily insert the tread plank under the stair riser plank.</p>
3		<p>Measure the riser.</p>
4		<p>Saw a plank to the right size. If needed, click 2 planks together and only saw the tongue of the upper plank.</p> <p><i>For type C, saw the tread plank like this.</i></p>
5		<p>Apply glue to the plank.</p>
6		<p>Put the plank against the riser. The groove should be behind the spacers. Repeat 1-6 for the rest of the stairs.</p>
7		<p>Start at the top of the stairs and work downwards.</p>
8		<p>Measure the tread.</p>

9		Saw the aluminium subprofile to the right length.
10		Apply glue to the bottom of the subprofile.
11		Install the subprofile on the tread. Screw it to the stairs, with an interval of 15 cm. Make sure the screws are well countersunk.
12		Saw a plank to the right size. If needed, click 2 planks together and only saw the groove of the last plank. <i>For type C, saw the riser plank like this.</i>
13		Saw the Incizo® profile to the right length.
14		Depending on the type of subprofile you bought, it is supplied with or without a plastic insert. If a plastic insert is included, cut it to the correct length. *
15		If insert included: way of installing depends on floor thickness, carry out as indicated on the illustration. If insert not included: apply glue to the tongue of the plank. *
16		Apply glue to the subprofile and the rest of the tread. Apply in rows of +/- 3 mm.
17		Spread the glue out well on the subprofile (e.g. by means of a brush). It is important to move to the next steps without delay, so the tread is still adjustable when installing the Incizo® profile.
18		Install the tread plank. Do not press too firmly, so the plank does not tilt but stays nicely flat. <i>For type C, install the riser plank like this.</i>

19		<p>Apply glue on both sides of the Incizo® foot.</p>
20		<p>Stick the Incizo® profile horizontally onto the subprofile and adjust the Incizo® and the plank nicely for a level result. Repeat installation for the rest of the stairs. After installation, do not walk on the stairs for at least 24 hours.</p>

Installation instructions steps C



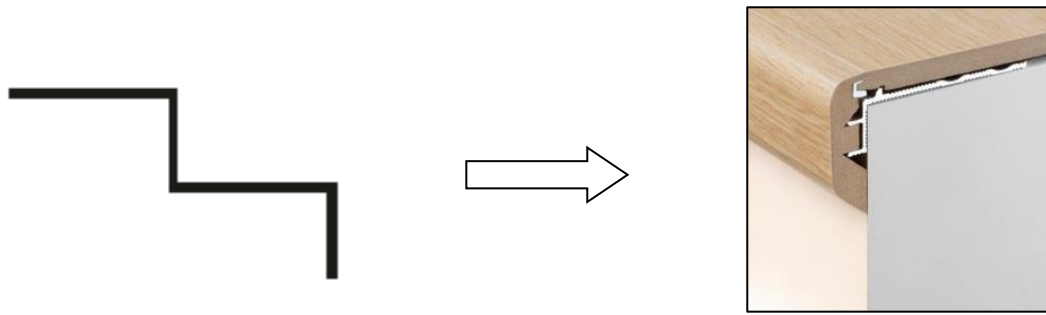
In certain cases an expansion joint is required: transition to a lower part of a room by means of a tread, transition to another type of floor at the top of the staircase,...











⇒ **Obligatory non-flush installation of the Incizo® stair profile to cover an expansion joint.**

See installation instructions staircase B.

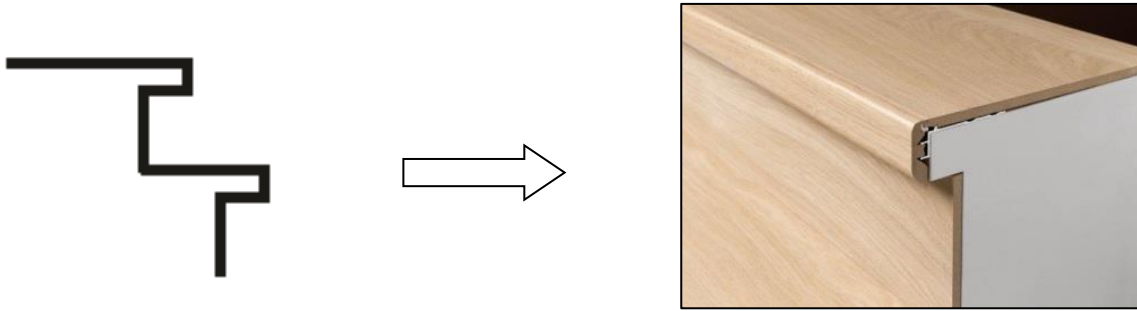
Installation instructions staircase D





















1		Start at the top of the stairs and work downwards.
2		Measure the tread.
3		Saw the aluminium subprofile to the right length.
4		Apply glue to the bottom of the subprofile.
5		Install the subprofile on the tread. Screw it to the stairs, with an interval of 15 cm. Make sure the screws are well countersunk.
6		Saw a plank to the right size. If needed, click 2 planks together and only saw the groove of the last plank.
7		Saw the Incizo® profile to the right length.
8		Depending on the type of subprofile you bought, it is supplied with or without a plastic insert. If a plastic insert is included, cut it to the correct length. *


9		<p>If insert included: way of installing depends on floor thickness, carry out as indicated on the illustration. If insert not included: apply glue to the tongue of the plank. *</p>
10		<p>Apply glue to the subprofile and the rest of the tread. Apply in rows of +/- 3 mm.</p>
11		<p>Spread the glue out well on the subprofile (e.g. by means of a brush). It is important to move to the next steps without delay, so the tread is still adjustable when installing the Incizo® profile.</p>
12		<p>Install the tread plank. Do not press too firmly, so the plank does not tilt but stays nicely flat.</p>
13		<p>Apply glue on both sides of the Incizo® foot.</p>
14		<p>Stick the Incizo® profile horizontally onto the subprofile and adjust the Incizo® and the plank nicely for a level result. Repeat installation for the rest of the stairs.</p> <p>After installation, do not walk on the stairs for at least 24 hours.</p>

Installation instructions staircase E




1		Start at the top of the stairs and work downwards.
2		Prepare 2 spacers per stair tread. Important: the spacers should have a thickness of the floor you use, plus 2 mm. This will enable you later to easily insert the tread plank under the stair riser plank.
3		Measure the riser.
4		Saw a plank to the right size. If needed, click 2 planks together and only saw the tongue of the upper plank.
5		Apply glue to the plank.
6		Put the plank against the riser. The groove should be behind the spacers. Repeat 1-6 for the rest of the stairs.
7		Start at the top of the stairs and work downwards.
8		Measure the tread.







9		Saw the aluminium subprofile to the right length.
10		Install the subprofile on the tread. Screw it to the stairs, with an interval of 15 cm. Make sure the screws are well countersunk.
11		Saw a plank to the right size. If needed, click 2 planks together and only saw the groove of the last plank.
12		Saw the Incizo® profile to the right length.
13		Depending on the type of subprofile you bought, it is supplied with or without a plastic insert. If a plastic insert is included, cut it to the correct length. *
14		If insert included: way of installing depends on floor thickness, carry out as indicated on the illustration. If insert not included: apply glue to the tongue of the plank. *
15		Apply glue to the subprofile and the rest of the tread. Apply in rows of +/- 3 mm.
16		Spread the glue out well on the subprofile (e.g. by means of a brush). It is important to move to the next steps without delay, so the tread is still adjustable when installing the Incizo® profile.
17		Install the tread plank. Do not press too firmly, so the plank does not tilt but stays nicely flat.
18		Apply glue on both sides of the Incizo® foot.

<p>19</p>		<p>Stick the Incizo® profile horizontally onto the subprofile and adjust the Incizo® and the plank nicely for a level result. Repeat installation for the rest of the stairs.</p> <p>After installation, do not walk on the stairs for at least 24 hours.</p>
------------------	---	--

Installation instructions staircase F



1		<p>Start at the top of the stairs and work downwards.</p>
2		<p>Measure the tread.</p>
3		<p>Saw the aluminium subprofile to the right length.</p>
4		<p>Apply glue to the bottom of the subprofile.</p>
5		<p>Install the subprofile on the tread. Screw it to the stairs, with an interval of 15 cm. Make sure the screws are well countersunk.</p>
6		<p>Saw a plank to the right size. If needed, click 2 planks together and only saw the groove of the last plank.</p>
7		<p>Saw the Incizo® profile to the right length.</p>
8		<p>Depending on the type of subprofile you bought, it is supplied with or without a plastic insert. If a plastic insert is included, cut it to the correct length. *</p>

<p>9</p>	 <p>Diagram illustrating the installation of a subprofile. It shows three options for the insert: BLUE, WHITE, and BLACK. A warning symbol (a crossed-out square) is also present, indicating a specific installation requirement.</p>	<p>If insert included: way of installing depends on floor thickness, carry out as indicated on the illustration. If insert not included: apply glue to the tongue of the plank. *</p>
<p>10</p>	 <p>Diagram showing the application of glue to the subprofile.</p>	<p>Apply glue to the subprofile and the rest of the tread. Apply in rows of +/- 3 mm.</p>
<p>11</p>	 <p>Diagram showing the glue being spread on the subprofile using a brush.</p>	<p>Spread the glue out well on the subprofile (e.g. by means of a brush). It is important to move to the next steps without delay, so the tread is still adjustable when installing the Incizo® profile.</p>
<p>12</p>	 <p>Diagram showing the installation of the tread plank onto the subprofile.</p>	<p>Install the tread plank. Do not press too firmly, so the plank does not tilt but stays nicely flat.</p>
<p>13</p>	 <p>Diagram showing the application of glue to the Incizo profile.</p>	<p>Apply glue on both sides of the Incizo® foot.</p>
<p>14</p>	 <p>Diagram showing the Incizo profile being stuck to the subprofile. A symbol indicates a 24-hour drying time.</p>	<p>Stick the Incizo® profile horizontally onto the subprofile and adjust the Incizo® and the plank nicely for a level result. Repeat installation for the rest of the stairs.</p> <p>After installation, do not walk on the stairs for at least 24 hours.</p>

Side finishing

To finish off the sides of the stairs we recommend using laminated sheets. These are available for sale in most specialty retailers or DIY stores. Laminated sheets are about 0,7 – 0,9 mm and available in different colors. They can be applied to the side of the stairs with contact glue. An alternative solution could be to finish of the sides of the stairs with MDF.

OR



You can finish half-open stairs with Incizo, at the side serrated side of the floorboard. Saw the incizo profile and the aluminum subprofile with the miter saw and place them as explained here above.

*** Plastic insert**

Depending on the type of subprofile you bought, it is supplied with or without a plastic insert.

Subprofile for stairs	Plastic insert
NEINCPBASE1ME215	blue
NEINCPBASE2ME215	white
NEINCPBASE3ME215	black
NEINCPBASE7ME215	black
NEINCPBASE8ME215	black
NEWINCPBASE2ME215	no insert
NEWINCPBASE3ME215	no insert