



# Beautiful, comfortable

Titan Hybrid flooring wants to help you create a space that you will love coming home to. Whether you need an extra-resilient floor that can handle your family's demanding routines, or a trendy new statement for your next renovation.



#### Waterproof

- 100% waterproof flooring panels
- Suitable for bathrooms, laundries & kitchens
- Resists most household spills



#### Uniclic® installation system

- Fastest and easiest installation system, ideal for DIY
- Can be walked on during and immediately after installation



#### Matching Accessories

Perfectly matched accessories for a beautiful finish



#### Quiet & comfortable

- Excellent footfall sound reduction
- Simply more comfortable underfoot



#### Scratch resistant

- Resisistant to scratching and marking
- Strong wear layer to protect from everyday wear and tear



#### Non toxic

- 100% ortho-phthalate free
- Safe for the whole family to live on



#### Family friendy

· Built to withstand daily wear and tear

# & practical

Titan Hybrid is a rigid core flooring product, both beautiful and tough. The planks and their stunning designs reflect the beauty of real timber and emit a sense of warmth and style throughout your home.



#### Realistic designs

- 10 exclusive designs, including stunning Australian wood species decors
- Generous plank size with incredible authenticity



#### Easy to clean

- Low maintenance due to its protective coating & matt finish
- Wet mop friendly



#### Impact resistant

More indentation resistant than many other hard flooring options



#### Compatible with floor heating

 Can be installed over in-slab floor heating systems with a subfloor temperature up to 27°C degrees (refer to installation instructions)



#### Pet friendly

• Muddy paws and little accidents... no problems!



#### Low impact noise

 Titan Hybrid has achieved a 6 star rating for multistorey noise. Making it ideal for apartment living.



#### 20 year residential wear warranty

• Enjoy your floor with the confidence provided by a 20 year residential wear warranty







A range of carefully chosen designs, rigorously tested for durability, so you know they will stay beautiful for years to come.





TIR035 Spotted Gum TIR169







Bleached Blackbutt TIR171





Alpine Grey Ash TIR178

TIR179 Frosted Ironbark





TIR180


Spring Valley Oak TIR181





Moonlight Gum

TIR182 Warm Urban Oak **TIR183** 

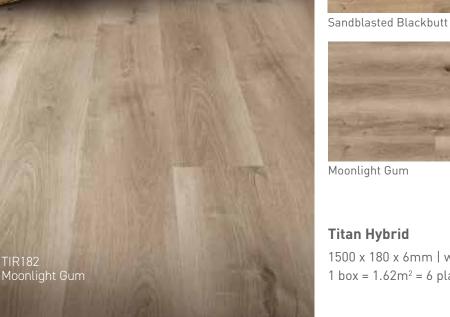

### **Titan Hybrid**

1500 x 180 x 6mm | with beveled edges  $1 \text{ box} = 1.62 \text{m}^2 = 6 \text{ planks}$ 

Click planks with a rigid core and integrated underlay, ideal for mildly uneven subfloors.



Subfloor	Mildly irregular subfloor Minimal floor preparation needed	
Installation	UNICLIC ® PATENTED TECHNOLOGY	
Residential warranty	20 years	
Walk noise reduction	•••	
Plank size	1500 x 180mm	
Plank thickness	6mm (including 1mm built-in underlay)	
Wear layer	0.50mm - Class 33	











Titan Hybrid offers a complete solution with perfectly matching accessories for a beautiful finish of your floor.



Scotia
TIVSCOT(-)
2400 x 15 x 15mm
Discreet 15mm matching and waterproof scotia



Stair Nose
TIVSTP(-)
2400 x 110 x 36mm
Matching 'custom look' stair nose
to finish stairs beautifully



Expansion Cover
TIVEXC(-)
2400 x 45mm
Matching low profile and
waterproof expansion cover



End profile
RVE3.4CH
6mm end profile in champagne
finish enabling transitions to floor
coverings such as carpet,window
frames and walls



## Product Specification Standard



Vinyl Category		SPC plank
Dimensions		1500 x 180mm
Total Thickness	EN ISO 24346	6mm
Wear Layer Thickness	EN ISO 24340	0.50mm
Usage Class	EN ISO 10874	Class 33 - AC5
Pack Size		1.62m² (6 planks)
Pack Weight		16.5kg
Pallet Size		84.24m² (52 packs)
Pallet Weight		890kg
Density	EN 436	2000kg/m3
Surface Treatment		UV (anti-bacterial)

## Physical Property Test Method

Dimensional Stability	EN ISO 23999	≤0.25%
Curling after Exposure to Heat	EN ISO 23999	≤1mm
Squareness & Straightness	EN 16511	<400mm: <0.25mm >400mm: >0.35mm
Residual Indentation	EN ISO 24343-1	≤0.1mm
Light Fastness	EN ISO 105-B02	≽6
Impact Sound Reduction	EN ISO 140-7	6 star Certificate available
Slip Resistance	AS/NZS4586 2004	P3
Abrasion Group	EN660-2 / EN16511	Group T / AC5 (0.50)
Fire Resistance	AS/ISO 9239.1-2003	9.4 kW/m2
Thermal Resistance	EN 12667	0.017 (m2K)/W
Electric Behavior	EN 1815	≤2KV
Indoor Air Quality		Low VOC
Plasticizer		Ortho-phthalate free
Residential Warranty	Domestic use	20 year wear warranty



